


CROSS SECTION OF THRESHOLD

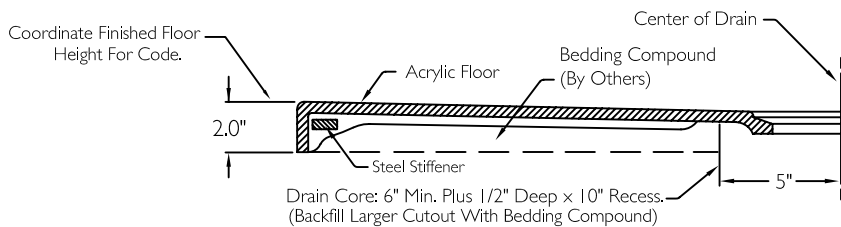

SUBMITTAL

This shower enclosure shall be model XSA 5336 BF 2.0" center. Finished surface shall be of a sanitary grade acrylic exhibiting a minimal thickness of 15 dry mils and a finished cured Barcoal hardness of 80-90 as tested with ASTM D-2583. Unit construction shall be of a molded reinforced fiberglass with a 15% minimum fiberglass content.

The unit shall have outside dimensions of 53 1/4" x 36" x 84". The unit shall meet ANSI Z124.1-2, HUD, FHA, BOCA, NAHB UPC, shall meet requirements as an ANSI B shower stall, and shall meet the requirements of the Southern Building Code.

The enclosure shall be equipped with the following accessories:
 1) wood backing on all walls for future installation of grab bars and seat per HUD and FHA guidelines, 2) molded shelf on the back wall, 5) one inch diameter, 18 gauge white curtain rod
 6) 2.0" threshold.
 Note: Future grab bars and seat by others.

THIS UNIT FEATURES THE OUTSIDE DIMENSION OF 53 1/4" OF OVERALL WIDTH. THIS DOES NOT ALLOW FOR FULL ENCLOSURE OF THE BOLTS AND NUTS USED TO SECURE THE BARS AND SEAT IN PLACE. THE BOLT AND NUT COMBINATION SHOULD NOT PROTRUDE MORE THAN 3/4" ON EITHER SIDE OF THE SHOWER WALLS. THIS MAY REQUIRE THE NEED TO NOTCH STUDS TO ALLOW BOLT CLEARANCE FOR A DRYWALL ENCLOSED FIRE WALL INSTALLATION. ADJUSTMENT OF THE WALL BOARD MAY BE NECESSARY TO PROVIDE CLEARANCE OF THE BOLT(S) WHILE MAINTAINING THE INTEGRITY OF THE DRYWALL ENCLOSED FIRE WALL ENCLOSURE.

NOTE: THIS UNIT WILL NOT ACCEPT A DOOR.

Job Name	Approved By	Name	Date	COMFORT DESIGNS	
Project No Comfort Designs 435 Industrial Road Savannah, TN 38372 tel 800.443.7269 fax 731.925.4290 www.comfortdesignsbathware.com	Architect			Model No. XSA 5336 BF 2.0 ANSI B-I	
	Engineer			Drawing No. XSA 5336 BF 2.0 FBP WCR	
	Rep			Date Issued. 6-6-12	Drawing Rev.
	Wholesaler			Material. Acrylic	
	Comments				Color.
				Dimensions are in inches. Due to the nature of the materials dimensions may vary ± 1/2"	