

### SPECIFICATION SHEET

This shower enclosure shall be model XSB 3838 BF RRF I.0 center. Finished surface shall be of a sanitary grade AcrylX™ applied acrylic.

Unit construction shall be of a molded reinforced fiberglass with a 15% minimum fiberglass content.

The unit shall have outside dimensions of 38 1/2" x 37 3/8" x 4 3/4", and 42" wide at the front.


The unit shall meet ANSIZ124.1.2, CSA B45.5, ADA, and ICC/ANSI A117.1.

### HANDED BY THE CENTER


NOTE: Unit size qualifies for ADA, ANSI A117.1 guidelines, as a transfer shower application provided properly sized wall enclosure with code grab bar package, fold up seat and hand held shower required to comply with ADA, and ICC/ANSI A117.1 are installed by others.

The enclosure shall be equipped with the following accessories:

- 1) Recessed receiver flange on both sides,
- 2) Center drain location,
- 3) Slip resistant surface on floor,
- 4) AcrylX™ applied acrylic surface,
- 5) Armor Core Easy Base bottom,
- 6) 1.0" Threshold.

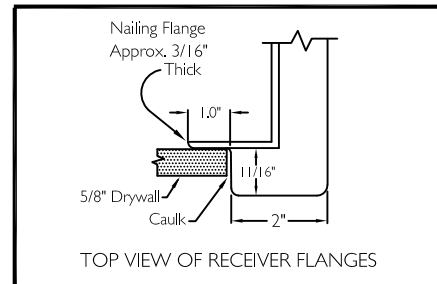

### CROSS SECTION OF THRESHOLD

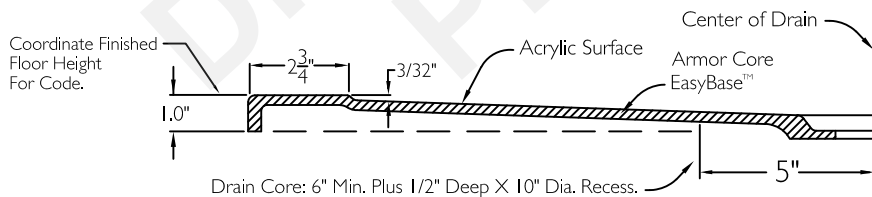

Job Name	Approved By Print Name	Date	<b>COMFORT DESIGNS</b>	
Project No	Approved By Signature		Model No. XSB 3838 BF RRF I.0 Low Base	
Comfort Designs 435 Industrial Road Savannah, TN 38372 tel 800.443.7269 fax 731.925.4290 www.comfortdesignsbathware.com	Architect		Drawing No. XSB 3838 BF RRF I.0 Low Base	
	Engineer		Date Issued. 4-3-12	Drawing Rev. 7-6-20
	Rep		Material. AcrylX™ applied acrylic	
	Wholesaler		Color.	
	Comments			Dimensions are in inches. Due to the nature of the materials dimensions may vary ± 1/2"